



PFASARMOR[™]

**THE SHIELD
AGAINST
PERSISTENT
CONTAMINANTS**

PFAS Armor™

Proprietary carbon-based media

PFAS are a group of substances known for their chemical stability and ability to withstand high temperatures: these properties make them widely used in industrial and commercial applications. However, as persistent pollutants, often referred to as 'forever chemicals', they raise environmental and health concerns. That's why they need to be removed from water. That's why we need to use the right solution.

PFAS Armor cartridge is designed to remove PFOA+PFOS from water. The cartridge also removes chlorine, taste, odor, chemicals.


MAX WORKING TEMPERATURE
45°C (113°F)
MIN WORKING TEMPERATURE
4°C (39,2°F)


COLD WATER

PFAS treatment.
Life-span: 113562 L
Maintenance: none.

SPECIFICATIONS

Selected raw materials, suitable for drinking water.



Filter medium: proprietary carbon-based media

Gasket: NBR

Endcaps: PP polypropylene

External net: PP polypropylene

test carried on PFAS Armor System: DP BIG 20 MONO + CB PFAS Armor 20 BIG

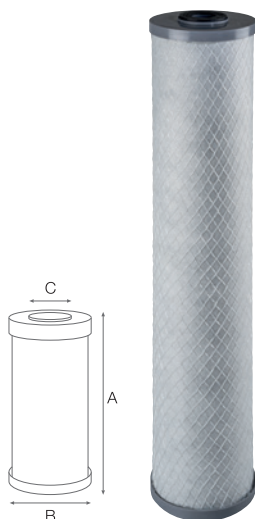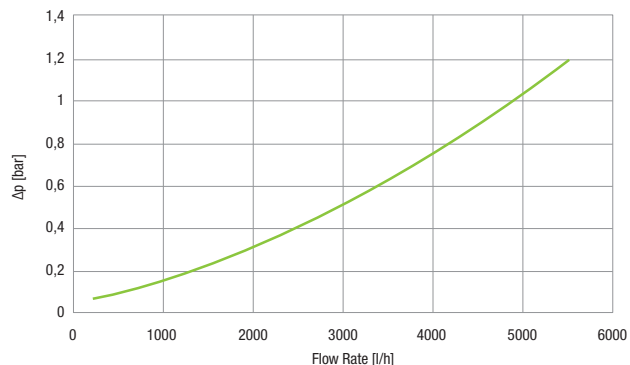

PFAS Armor™

PART NUMBER	MODEL	NOMINAL HEIGHT	FILTRATION MICRON	MAX FLOW RATE l/h	DIMENSIONS mm		
RE5397625	PFAS Armor 20" BIG SX 1mcr	20"	1	1800	A	B	C

PFOA+PFOS reduction capacity tested with 1,5 µg/L in influent water with 95% or greater reduction (meets PFAS reduction criteria as per NSF/ANSI 53 - 2021 test protocol for PFAS reduction).

MODELS:

- PFASARMOR 20" BIG series 20", OD 4.50", ID 1.10". SX configuration

CERTIFICATIONS:



PFAS ARMOR™ cartridge is tested and certified under the most stringent procedures worldwide, in compliance with DM 25 (Italy) and EAC/Ghostreghistracia (Russia).



www.atlasfiltri.com | **MADE IN ITALY**



This cartridge has been independently tested by IAPMO R&T lab in a generic housing for PFOA/PFOS reduction claim at 4 gpm flow rate and 30,000 gallons capacity without PID.